


# CONNECTORIZED PHASE SHIFTERS



## ELECTRICAL CHARACTERISTICS

PART #	TYPE	FREQ RANGE GHz	LOSS dB	PHASE SHIFT	VSWR	SWITCH SPEED ns	RF POWER dBm	DC SUPPLY Volts
4031	6 Bit	1.2-1.5	1.7	360°	1.5:1	1500	50	+5,-70
4032	6 Bit	9-10	3.5	360°	2.0:1	25	20	+5,-5

## PACKAGE OUTLINE

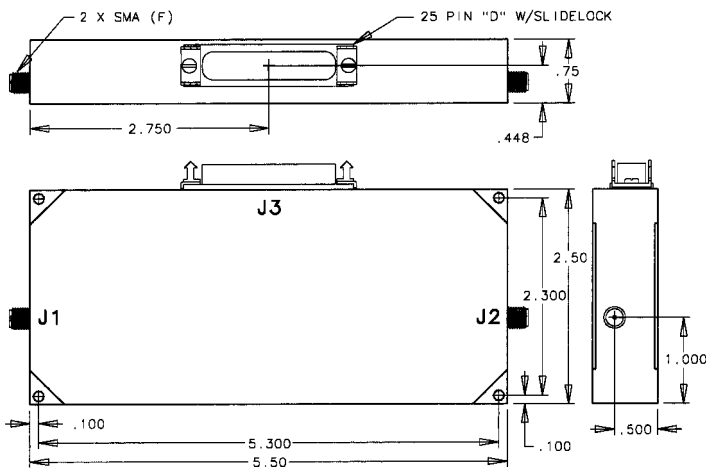

## DESCRIPTION

Digital phase shifters optimized for low loss and/or high power. Each one features a unique capability which allows it to be used in either the transmit or receive path. Hermetic, military/industrial design.

## ADDITIONAL FEATURES (#4031)

- Low loss: 1.7 dB
- RF power: 50 dBm

## CONNECTORS

- SMA

## OPERATING ENVIRONMENT

- Operating Temperature: -55 to +125°C
- Storage Temperature: -65 to +150°C
- Impedance: 50 ohm
- Control: TTL (complementary)

## APPLICATIONS

- Phased array radar
- Satellite communications


# CONNECTORIZED PHASE SHIFTER



## ELECTRICAL CHARACTERISTICS

PART #	TYPE	FREQ RANGE GHz	LOSS dB	PHASE SHIFT	VSWR	SWITCH SPEED ns	RF POWER dBm	DC SUPPLY Volts
4033	5 Bit	6-18	10	360°	2.0:1	25	10	+5

## PACKAGE OUTLINE

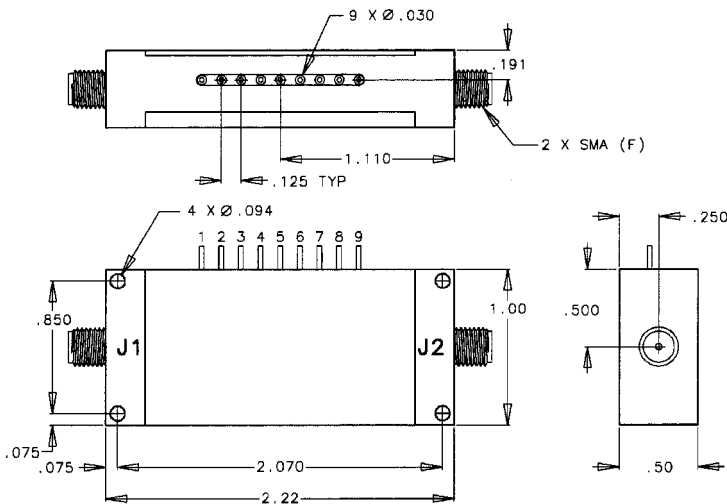

## DESCRIPTION

A digital phase shifter optimized for high frequency (6 to 18 GHz), flat phase versus frequency, low power applications. Hermetic, military/ industrial design.

## ADDITIONAL FEATURES

- Current: <2 ma
- Accuracy: <5%

## CONNECTORS

- SMA

## OPERATING ENVIRONMENT

- Operating Temperature: -55 to +125°C
- Storage Temperature: -65 to +150°C
- Impedance: 50 ohm
- Control: Transistor-Transistor Logic (TTL)

## APPLICATIONS

- Automatic test (ATE)
- Communication channel emulator
- Phase tuner